



Latiguillo RJ45 Cat 6 FTP LSZH colores

Características

Cable de red Cat 6 FTP LSZH

Colores del cable: amarillo, azul, naranja, negro, rojo y verde

AWG 24


Alcanza frecuencias de hasta 250 MHz en cada par y una velocidad de 1 Gbps

Cubierta libre de halógenos, resistencia a la propagación del fuego IEC 60332-1-2 y CPR EN50575:2014+A1:2016

Cumple certificado CE y ROHS




Embalaje, bolsa retail con auto-cierre, etiqueta con descripción y código de barras

Dibujos técnicos

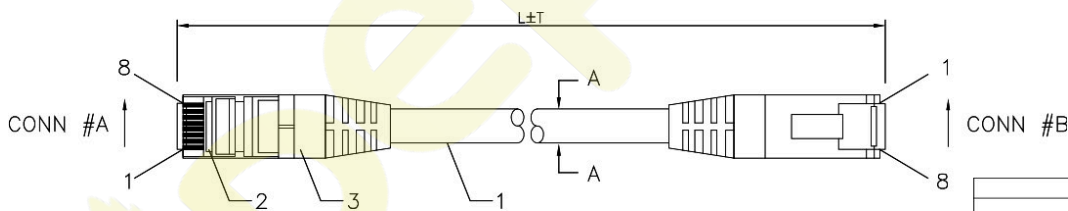

| | | | | | |
|-----|----------|-----------|--|------|---------------|
| 3 | | MOLDING | LSZH | 2 | GREY |
| 2 | | CONN. | RJ45 with screen 50 micches gold contact | 2 | TRANSPARENCIA |
| 1 | | CABLE | 7*0.22CCA ALFOIL, OD5.8 | 1 | GREY |
| NO. | PART NO. | PART NAME | MATERIAL | Q'TY | REMARKS |

PINOUT (T658B)

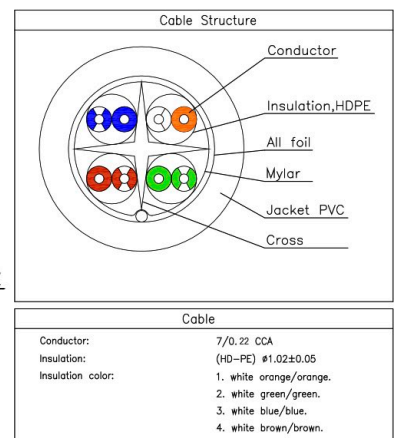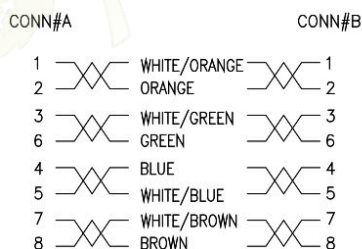

Datos técnicos

| Electrical Characteristics (20°C) | | |
|--------------------------------------|------------------------------|--------------|
| Standard: | TIA/EIA-568-B-2&IEC/ISO11801 | |
| Tests: | Units | Spec. |
| 1. Conductor C. Resistance | $\Omega/100m$ | <28.1 |
| 2. Imbalance of Pair D.C. Resistance | % | <2.5 |
| 3. Insulation Resistance | M Ω KM | >5000 |
| 4. Capacitance | nF/100m | <5.6 |
| 5. Imbalance of Capacitance | pF/100m | <330 |
| 6. Dielectric Strength between Pairs | Kv/min | <1.0 |
| 7. Characteristic impedance | Ω | 100 \pm 15 |
| 8. Operating | -45°C ~ +65°C | |

| Frequency (MHZ) | PSNEXT (dB) | ELTEXT (dB/100m) | SELTEXT (dB/100m) | Transmit Speed |
|-----------------|-------------|------------------|-------------------|----------------|
| 0.772 | 74 | 70 | 67 | 0.65C |
| 1 | 72.5 | 67.8 | 64.8 | |
| 4 | 63.5 | 55.8 | 52.8 | |
| 8 | 58.8 | 49.7 | 46.7 | |
| 10 | 57.3 | 47.8 | 44.8 | |
| 16 | 54.2 | 43.7 | 40.7 | |
| 20 | 52.8 | 41.8 | 38.8 | |
| 25 | 51.3 | 39.8 | 36.8 | |
| 31.25 | 49.9 | 37.9 | 34.9 | |
| 62.5 | 45.4 | 31.9 | 28.9 | |
| 100 | 42.3 | 37.8 | 24.8 | |
| 200 | 37.8 | 21.8 | 18.8 | |
| 250 | 36.3 | 19.8 | 16.8 | |

| Frequency (MHZ) | (ohm) | RL (dB) | ATTN (dB/100m) | NEXT (dB) |
|-----------------|-----------------------|---------|----------------|-----------|
| 0.772 | 100 \pm 10 Ω | 19.4 | 1.8 | 76 |
| 1 | | 20.0 | 2.0 | 74.3 |
| 4 | | 23.0 | 3.8 | 65.3 |
| 8 | | 24.5 | 5.3 | 60.8 |
| 10 | | 25.0 | 6 | 59.3 |
| 16 | | 25.0 | 7.6 | 56.2 |
| 20 | | 25.0 | 8.5 | 54.8 |
| 25 | | 24.3 | 9.5 | 53.3 |
| 31.25 | | 23.6 | 10.7 | 51.9 |
| 62.5 | | 21.5 | 15.4 | 47.4 |
| 100 | | 20.1 | 19.8 | 44.3 |
| 200 | | 18 | 29 | 39.8 |
| 250 | | 17.3 | 32.8 | 38.3 |

| Referencia | Código EAN | Caja | Long. | Color |
|---------------|---------------|------|--------|----------|
| CAB-06002-FLY | 8436539917427 | 280 | 0,25 m | Amarillo |
| CAB-06005-FLY | 8436539917489 | 220 | 0,50 m | Amarillo |
| CAB-06010-FLY | 8436539917540 | 160 | 1,00 m | Amarillo |
| CAB-06020-FLY | 8436539917601 | 120 | 2,00 m | Amarillo |
| CAB-06030-FLY | 8436539917663 | 100 | 3,00 m | Amarillo |
| CAB-06002-FLB | 8436539917397 | 280 | 0,25 m | Azul |
| CAB-06005-FLB | 8436539917434 | 220 | 0,50 m | Azul |
| CAB-06010-FLB | 8436539917496 | 160 | 1,00 m | Azul |
| CAB-06020-FLB | 8436539917557 | 120 | 2,00 m | Azul |
| CAB-06030-FLB | 8436539917618 | 100 | 3,00 m | Azul |
| CAB-06002-FLO | 8436539915188 | 280 | 0,25 m | Naranja |
| CAB-06005-FLO | 8436539917458 | 220 | 0,50 m | Naranja |
| CAB-06010-FLO | 8436539917519 | 160 | 1,00 m | Naranja |
| CAB-06020-FLO | 8436539917571 | 120 | 2,00 m | Naranja |
| CAB-06030-FLO | 8436539917632 | 100 | 3,00 m | Naranja |

| Referencia | Código EAN | Caja | Long. | Color |
|---------------|---------------|------|--------|-------|
| CAB-06002-FLR | 8436539917410 | 280 | 0,25 m | Rojo |
| CAB-06005-FLR | 8436539917465 | 220 | 0,50 m | Rojo |
| CAB-06010-FLR | 8436539917526 | 160 | 1,00 m | Rojo |
| CAB-06020-FLR | 8436539917588 | 120 | 2,00 m | Rojo |
| CAB-06030-FLR | 8436539917649 | 100 | 3,00 m | Rojo |
| CAB-06002-FLG | 8436539917380 | 280 | 0,25 m | Verde |
| CAB-06005-FLG | 8436539917441 | 220 | 0,50 m | Verde |
| CAB-06010-FLG | 8436539917502 | 160 | 1,00 m | Verde |
| CAB-06020-FLG | 8436539917564 | 120 | 2,00 m | Verde |
| CAB-06030-FLG | 8436539917625 | 100 | 3,00 m | Verde |
| CAB-06002-FLN | 8436539917403 | 280 | 0,25 m | Negro |
| CAB-06005-FLN | 8436539917472 | 220 | 0,50 m | Negro |
| CAB-06010-FLN | 8436539917533 | 160 | 1,00 m | Negro |
| CAB-06020-FLN | 8436539917595 | 120 | 2,00 m | Negro |
| CAB-06030-FLN | 8436539917656 | 100 | 3,00 m | Negro |



Made in China.



Las especificaciones e imágenes están sujetas a cambios sin previo aviso. Los nombres referidos y las marcas registradas son pertenecen a sus propietarios.