


LC-2200S20

Convertidor Fibra optica 10/100/1000Mbps SC



Estándares	IEEE802.3 10 BASE-T, IEEE802.3u 100 BASE-T, IEEE802.3z/ab 1000 BASE-T
Funciones	Mono-modo hasta 20Km
Fibra óptica	1310 nm 1000BASE-SX/LX
Conexiones	1 Puerto RJ-45 10/100/1000 Mbps (Auto MDI/MDIX) 1 Puerto Fibra SC 1000Mbps
Cable UTP	Cat 5 o superior hasta 100 metros
Cable Fibra	50/125
Indicadores de LED	Power, 100, 1000, TX, FX, FDX
Control de flujo	IEEE802.3x para Full-duplex con Backpressure flow control para Half-duplex
Alimentación	Externa 2 A / 5V
Condiciones ambientales	Temperatura: 0° a 50° Humedad: 5% a 90%
Dimensiones	26.2(ancho)x 70.3(alto)x94(largo) mm
Certificaciones	FCC part 15 CLASS A y CE MARK
Instalación	Se puede instalar de manera individual o bien posibilidad de instalación en chasis LCR14, hasta 14 dispositivos del mismo modelo o combinados.

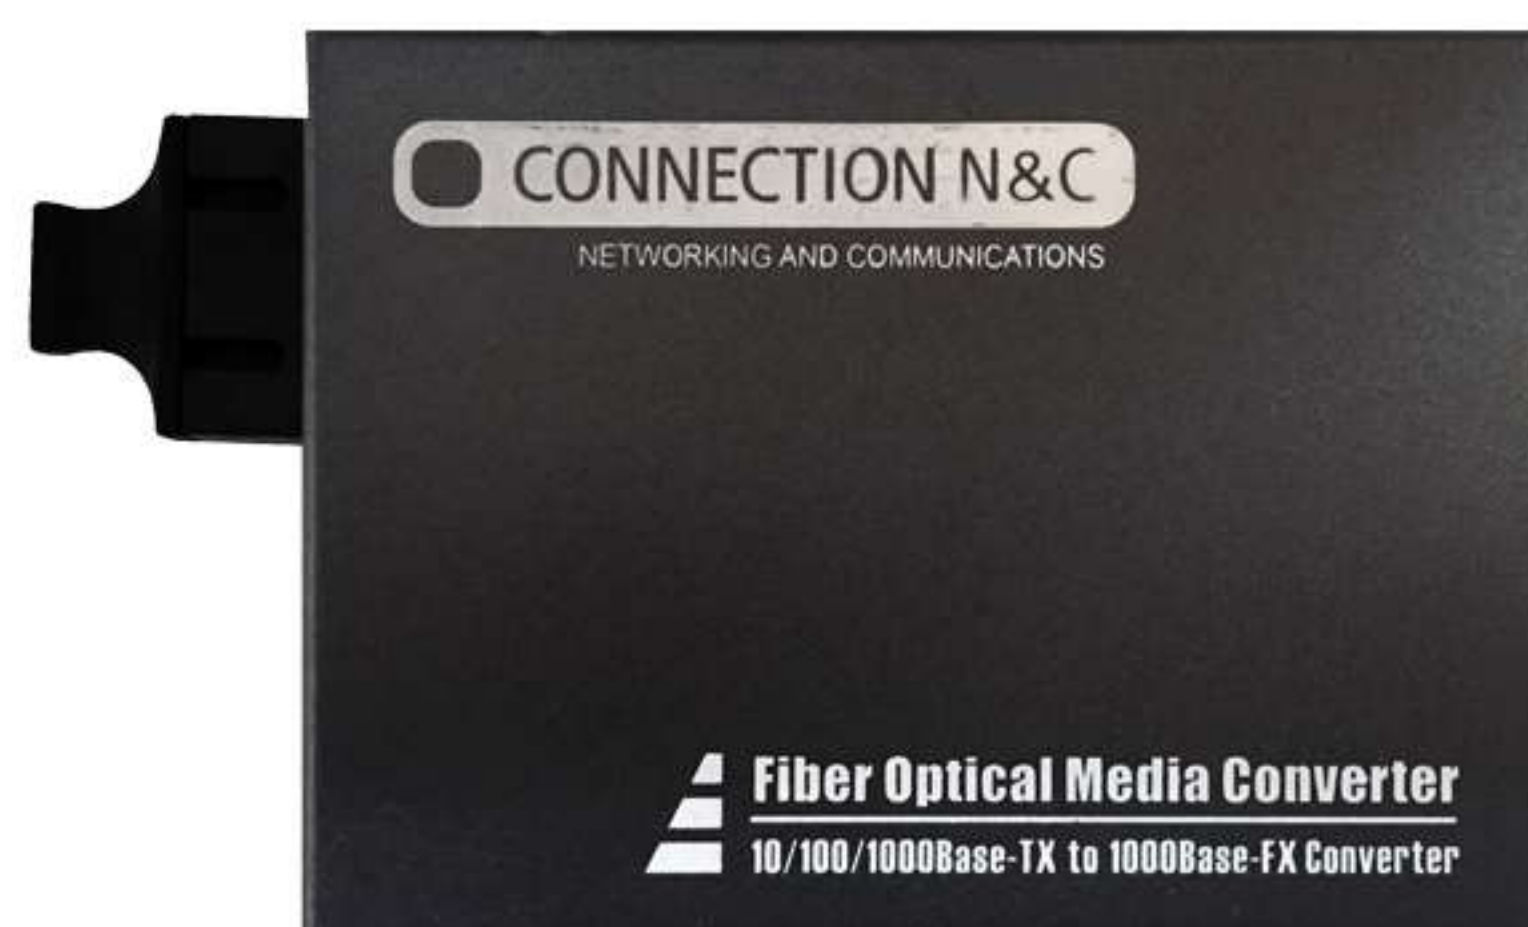

www.connectionnc.com

Telf. 902 88 31 21



NETWORKING AND COMMUNICATIONS