

Patch panel 24 puertos Cat.6 FTP

Características

Patch Panel 24 puertos Cat 6 FTP RJ45

Compatible con Cat 5e FTP


Es adecuado para gabinete estándar de 19"

El bloque de conexión admite AWG22-26

Contactos chapado en oro de 50 micro pulgadas

Material: PC / PPO

Dibujos técnicos

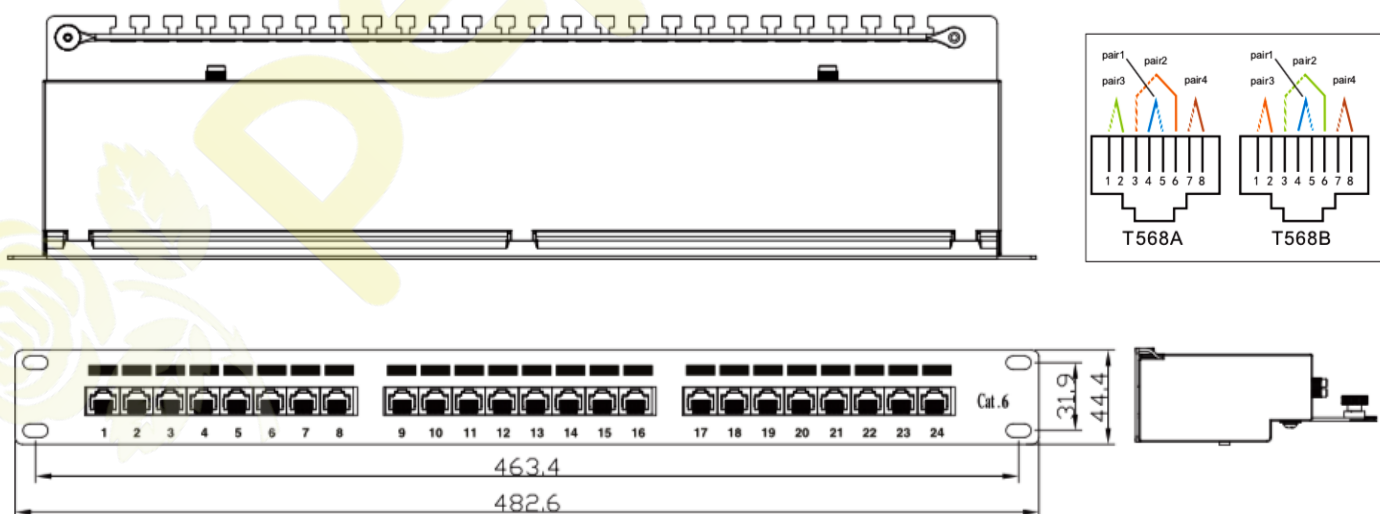

Datos técnicos

Specification:

Material:

1. Panel: 1.6mm/SPCC with Black color painting.
2. RJ45 Housing: PBT.
3. RJ45 Contact material & finished:
- 3-1. Phosphor Bronze with 50-60 micro-inch Nickel plated.
- 3-2. Contact area: Min. 3mm 50 micro-inch Gold plated.
4. IDC House: PC.
5. IDC Terminal material & finished:
- 5-1. Phosphor Bronze with 50 micro-inch Tin-Lead plated. over 50-60 micro-inch Nickel plated.
- 5-2. Krone tool compatible.
- 5-3. Use for 22-26AWG stranded and solid wire.
6. Jack Bracket Set: ABS, Black color

Performance:

- a. The IDC color combine two wirings of T568A & T568B.
- b. Insertion Force: 900 grs for 8 contacts.
- c. Retention Strength: 7.7 kgs between Jack and Plug.
- d. Operation Temperature: -40°C to 70°C
- e. Durability:
- e-1. Jack: 750 cycles Plug-Jack mating and unmating test, Insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
- e-2. IDC: Max. 200 punching times.
- f. The Cat. 6 performance is in compliance with the ANSI/TIA/EIA 568 B.2 standard.

Referencia	Código EAN	Uds. caja	Dimensiones y peso
PAT-06024-FT	8436539918066	20	482,6 x 44,3 x 99,2 mm 1 kg

